


Sechskant-Anschweissnippel

mit kegeligem Whitworth-Rohrgewinde nach DIN EN 10226

SF
GF-100
HEX

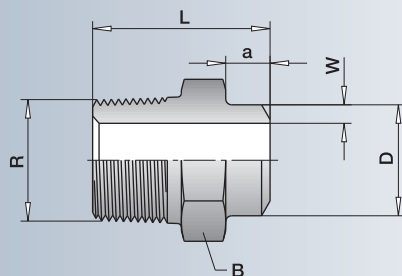

PN	DN	R	D x W	B	L	a	GF-No.	€
50	8	1/4"	12 x 2,0	14	24	6,0	GF-100HEXR141220-7	
	10	3/8"	15 x 2,5	17	25	6,0	GF-100HEXR381525-7	
	15	1/2"	18 x 3,0	22	29	7,0	GF-100HEXR121830-7	
	15	1/2"	22 x 2,0	24	29	7,0	GF-100HEXR122220-7	
	20	3/4"	25 x 2,5	30	32	7,0	GF-100HEXR342525-7	
40	20	3/4"	28 x 2,5	30	32	7,0	GF-100HEXR342825-7	
	25	1"	30 x 2,5	36	35	7,0	GF-100HEXR13025-7	
	25	1"	34 x 3,0	36	40	12,5	GF-100HEXR13430-7	
	32	1 1/4"	38 x 3,0	46	45	8,0	GF-100HEXR1143830-7	
	32	1 1/4"	42 x 3,0	46	46	14,0	GF-100HEXR1144230-7	
25	40	1 1/2"	48 x 3,0	50	50	16,0	GF-100HEXR1124830-7	
	50	2"	59 x 3,5	65	54	16,0	GF-100HEXR25935-7	
	65	2 1/2"	76 x 3,5	80	60	16,0	GF-100HEXR2127635-7	
	80	3"	89 x 4,5	90	65	16,0	GF-100HEXR38945-7	

■ Werkstoff: 1.4571