


Einschraubschlauchnippel

mit zylindrischem Whitworth-Rohrgewinde nach DIN/ISO 228
mit 37°-Innenkonus

SF
GF-
139
G

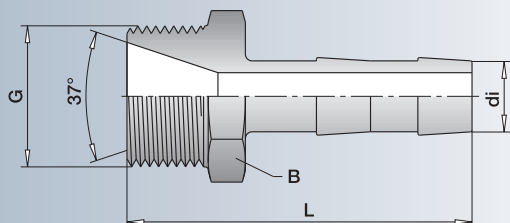

PN	G	Schlauch di	B	L	GF-No.	€
50	G 1/8"	4	14	47	GF-1394G18-7	
	G 1/8"	6	14	47	GF-1396G18-7	
	G 1/8"	9	14	47	GF-1399G18-7	
	G 1/4"	4	17	48	GF-1394G14-7	
	G 1/4"	6	17	48	GF-1396G14-7	
	G 1/4"	9	17	48	GF-1399G14-7	
	G 1/4"	13	17	48	GF-13913G14-7	
	G 3/8"	4	19	49	GF-1394G38-7	
	G 3/8"	6	19	49	GF-1396G38-7	
	G 3/8"	9	19	49	GF-1399G38-7	
	G 3/8"	13	19	49	GF-13913G38-7	
	G 1/2"	6	24	51	GF-1396G12-7	
	G 1/2"	9	24	51	GF-1399G12-7	
	G 1/2"	13	24	51	GF-13913G12-7	
	G 3/4"	9	27	57	GF-1399G34-7	
	G 3/4"	13	27	57	GF-13913G34-7	
	G 3/4"	16	27	68	GF-13916G34-7	
	G 1"	25	36	80	GF-13925G1-7	
	G 1"	32	36	85	GF-13932G1-7	

■ Werkstoff: 1.4571

Hinweis: Für den zulässigen Betriebsdruck einer Schlauchnippel-Verschraubung ist prinzipiell der max. zulässige Betriebsdruck des Schlauchherstellers zu beachten.