



Kegel-Einschraubverschraubung

kevG

mit zylindrischem Whitworth-Rohrgewinde nach DIN/ISO 228,
Passend in 24°-Innenkonen (Bohrungsform W DIN 3861)

SF
DK-
274


Weichdichtung

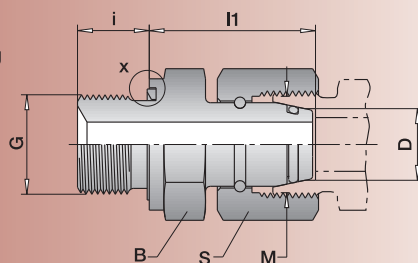

	PN	$\varnothing \approx D$	M	G	i	S	B	l ₁	O-Ring	DK-No.	€
L	315	6	M 12 x 1,5	G 1/8" A	8	14	14	24,5	5,0 x 1,0	DK-2746L	
		8	M 14 x 1,5	G 1/4" A	12	17	17	29,5	6,0 x 1,5	DK-2748L	
		10	M 16 x 1,5	G 1/4" A	12	19	19	27,5	7,5 x 1,5	DK-27410L	
		12	M 18 x 1,5	G 3/8" A	12	22	22	34,0	9,0 x 1,5	DK-27412L	
		15	M 22 x 1,5	G 1/2" A	14	27	27	32,0	12,0 x 2,0	DK-27415L	
		18	M 26 x 1,5	G 1/2" A	14	32	27	31,5	15,0 x 2,0	DK-27418L	
		22	M 30 x 2,0	G 3/4" A	16	36	32	32,5	20,0 x 2,0	DK-27422L	
	160	28	M 36 x 2,0	G 1" A	18	41	41	35,0	26,0 x 2,0	DK-27428L	
		35	M 45 x 2,0	G 1 1/4" A	20	50	50	42,5	32,0 x 2,5	DK-27435L	
		42	M 52 x 2,0	G 1 1/2" A	22	60	55	46,5	38,0 x 2,5	DK-27442L	
	S	6	M 14 x 1,5	G 1/4" A	12	17	17	27,0	5,0 x 1,0	DK-2746S	
		8	M 16 x 1,5	G 1/4" A	12	19	19	29,5	6,0 x 1,5	DK-2748S	
		10	M 18 x 1,5	G 3/8" A	12	22	22	32,0	7,5 x 1,5	DK-27410S	
		12	M 20 x 1,5	G 3/8" A	12	24	24	34,0	9,0 x 1,5	DK-27412S	
		14	M 22 x 1,5	G 1/2" A	14	27	27	36,5	10,0 x 2,0	DK-27414S	
	400	16	M 24 x 1,5	G 1/2" A	14	30	27	37,0	12,0 x 2,0	DK-27416S	
		20	M 30 x 2,0	G 3/4" A	16	36	32	43,0	16,3 x 2,4	DK-27420S	
		25	M 36 x 2,0	G 1" A	18	46	41	48,0	20,3 x 2,4	DK-27425S	
		30	M 42 x 2,0	G 1 1/4" A	20	50	50	51,0	25,3 x 2,4	DK-27430S	
		315	M 52 x 2,0	G 1 1/2" A	22	60	55	60,0	33,3 x 2,4	DK-27438S	

■ Werkstoff: 1.4571

Dichtungswerkstoff: Viton