


Einschraubschlauchnippel

mit kegeligem Whitworth-Rohrgewinde nach DIN EN 10226

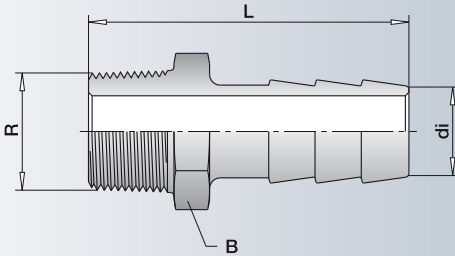

SF
GF-115 R

Schlauch						€	Schlauch						€
PN	R	di	B	L	GF-No.		PN	R	di	B	L	GF-No.	
50	1/8"	2,5	12	30	GF-11525R18-7		40	3/4"	9,0	27	50	GF-1159R34-7	
	1/8"	4,0	12	30	GF-1154R18-7			3/4"	11,0	27	50	GF-11511R34-7	
	1/8"	6,0	12	30	GF-1156R18-7			3/4"	13,0	27	52	GF-11513R34-7	
	1/8"	11,0	12	35	GF-11511R18-7			3/4"	16,0	27	55	GF-11516R34-7	
	1/4"	4,0	14	35	GF-1154R14-7			1"	13,0	36	55	GF-11513R1-7	
	1/4"	6,0	14	40	GF-1156R14-7			1"	16,0	36	60	GF-11516R1-7	
	1/4"	9,0	14	40	GF-1159R14-7			1"	19,0	36	65	GF-11519R1-7	
	1/4"	11,0	14	42	GF-11511R14-7			1"	25,0	36	70	GF-11525R1-7	
	3/8"	6,0	19	42	GF-1156R38-7			1 1/4"	16,0	46	65	GF-11516R114-7	
	3/8"	9,0	19	42	GF-1159R38-7			1 1/4"	19,0	46	70	GF-11519R114-7	
	3/8"	11,0	19	45	GF-11511R38-7			1 1/4"	25,0	46	75	GF-11525R114-7	
	3/8"	13,0	19	45	GF-11513R38-7			1 1/4"	30,0	46	80	GF-11530R114-7	
	1/2"	6,0	22	45	GF-1156R12-7			1 1/2"	19,0	50	75	GF-11519R112-7	
	1/2"	9,0	22	45	GF-1159R12-7			1 1/2"	25,0	50	80	GF-11525R112-7	
	1/2"	11,0	22	45	GF-11511R12-7			1 1/2"	30,0	50	85	GF-11530R112-7	
	1/2"	13,0	22	50	GF-11513R12-7			1 1/2"	38,0	50	90	GF-11538R112-7	
5/8"	9,0	24	50	GF-1159R58-7			2"	25,0	65	85	GF-11525R2-7		
	13,0	24	50	GF-11513R58-7				2"	30,0	65	90	GF-11530R2-7	
							2"	38,0	65	95	GF-11538R2-7		
								2"	50,0	65	100	GF-11550R2-7	

■ Werkstoff: 1.4571

Hinweis: Für den zulässigen Betriebsdruck einer Schlauchnippel-Verschraubung ist prinzipiell der max. zulässige Betriebsdruck des Schlauchherstellers zu beachten.