



Einschraubschlauchnippel

mit zylindrischem Whitworth-Rohrgewinde nach DIN/ISO 228

SF
GF-
116
G



metall. Dichtkante

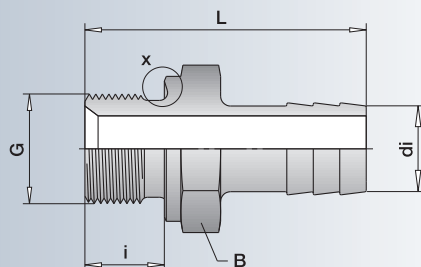

PN	G	Schlauch di	B	L	i	GF-No.	€
50	G 1/4"	4	19	35	12	GF-1164G14-7	
	G 1/4"	6	19	40	12	GF-1166G14-7	
	G 1/4"	9	19	40	12	GF-1169G14-7	
	G 3/8"	6	22	42	12	GF-1166G38-7	
	G 3/8"	9	22	42	12	GF-1169G38-7	
	G 3/8"	13	22	45	12	GF-11613G38-7	
	G 1/2"	6	27	45	14	GF-1166G12-7	
	G 1/2"	9	27	45	14	GF-1169G12-7	
	G 1/2"	13	27	50	14	GF-11613G12-7	
	G 3/4"	9	32	50	16	GF-1169G34-7	
40	G 3/4"	13	32	52	16	GF-11613G34-7	
	G 3/4"	16	32	55	16	GF-11616G34-7	
	G 1"	16	41	60	18	GF-11616G1-7	
	G 1"	19	41	65	18	GF-11619G1-7	
	G 1"	25	41	70	18	GF-11625G1-7	
	G 1 1/4"	19	50	70	20	GF-11619G114-7	
	G 1 1/4"	25	50	75	20	GF-11625G114-7	
	G 1 1/4"	30	50	80	20	GF-11630G114-7	
	G 1 1/2"	25	55	80	22	GF-11625G112-7	
	G 1 1/2"	30	55	85	22	GF-11630G112-7	
	G 1 1/2"	38	55	90	22	GF-11638G112-7	
	G 2"	38	70	95	24	GF-11638G2-7	
	G 2"	50	70	95	24	GF-11650G2-7	

■ Werkstoff: 1.4571

Hinweis: Für den zulässigen Betriebsdruck einer Schlauchnippel-Verschraubung ist prinzipiell der max. zulässige Betriebsdruck des Schlauchherstellers zu beachten.