



2-teiliger Muffenkugelhahn

offener Durchgang,
mit zylindrischem Whitworth-Rohrgewinde nach DIN/ISO 228
mit Flügelgriff, Ovalgriff oder mit Rückstellfeder




sf
A-
BV2
FL

DN	G	d	L	H	A-No.	€
8	G 1/4"	11,6	50,0	42,5	A-BV2G14FL-5i	
10	G 3/8"	12,7	52,0	42,5	A-BV2G38FL-5i	
15	G 1/2"	15,0	60,0	45,0	A-BV2G12FL-5i	
20	G 3/4"	20,0	77,0	51,3	A-BV2G34FL-5i	



sf
A-
BV2
OV

DN	G	d	L	H	R	A-No.	€
8	G 1/4"	11,6	50,0	46,0	102,0	A-BV2G14OV-5i	
10	G 3/8"	12,7	52,0	46,0	102,0	A-BV2G38OV-5i	
15	G 1/2"	15,0	60,0	48,0	102,0	A-BV2G12OV-5i	
20	G 3/4"	20,0	77,0	52,0	127,0	A-BV2G34OV-5i	
25	G 1"	25,4	87,0	84,0	136,5	A-BV2G1OV-5i	

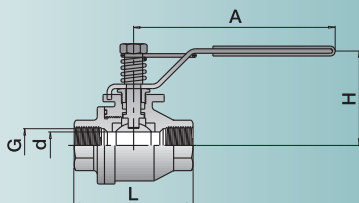

sf
A-
BV2
RS

DN	G	d	L	H	A	A-No.	€
8	G 1/4"	11,6	50,0	46,0	102,0	A-BV2G14RS-5i	
10	G 3/8"	12,7	52,0	46,0	102,0	A-BV2G38RS-5i	
15	G 1/2"	15,0	60,0	48,0	102,0	A-BV2G12RS-5i	
20	G 3/4"	20,0	77,0	52,0	127,0	A-BV2G34RS-5i	
25	G 1"	25,4	87,0	84,0	136,5	A-BV2G1RS-5i	