


3-teiliger Kugelhahn

offener Durchgang,
mit zylindrischem Whitworth-Rohrgewinde nach DIN/ISO 228
mit Baulänge nach DIN 3202 M3

SF
A-
BV3
G

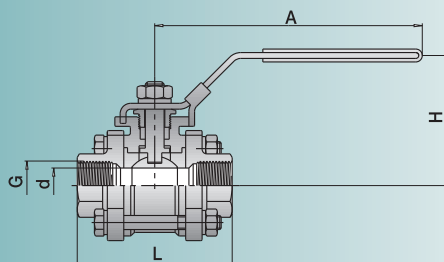

DN	G	d	L	H	A	A-No.	€
8	G 1/4"	11,6	65,0	51,0	103	A-BV3G14-5i	
10	G 3/8"	12,7	65,0	51,0	103	A-BV3G38-5i	
15	G 1/2"	15,0	72,0	54,0	103	A-BV3G12-5i	
20	G 3/4"	20,0	85,0	57,0	125	A-BV3G34-5i	
25	G 1"	25,4	91,9	66,0	145	A-BV3G1-5i	
32	G 1 1/4"	32,0	110,0	72,0	145	A-BV3G114-5i	
40	G 1 1/2"	38,0	122,7	81,5	190	A-BV3G112-5i	
50	G 2"	50,8	141,7	90,5	190	A-BV3G2-5i	
65	G 2 1/2"	65,0	173,8	138,5	250	A-BV3G212-5i	
80	G 3"	76,0	192,7	149,0	250	A-BV3G3-5i	
100	G 4"	100,0	274,1	176,5	288	A-BV3G4-5i	

mit Baulänge nach DIN 3202 M3

DN	G	d	L	H	A	A-No.	€
8	G 1/4"	11,6	50,0	55,0	96	A-BV3G14M3-5i	
10	G 3/8"	12,7	60,0	55,0	96	A-BV3G38M3-5i	
15	G 1/2"	15,0	75,0	64,0	96	A-BV3G12M3-5i	
20	G 3/4"	20,0	80,0	67,0	125	A-BV3G34M3-5i	
25	G 1"	25,4	90,0	83,0	145	A-BV3G1M3-5i	
32	G 1 1/4"	32,0	110,0	89,0	145	A-BV3G114M3-5i	
40	G 1 1/2"	38,0	120,0	95,0	200	A-BV3G112M3-5i	
50	G 2"	50,8	140,0	105,0	200	A-BV3G2M3-5i	
65	G 2 1/2"	65,0	185,0	145,0	255	A-BV3G212M3-5i	
80	G 3"	76,0	205,0	155,0	255	A-BV3G3M3-5i	
100	G 4"	100,0	240,0	176,5	288	A-BV3G4M3-5i	

■ Gehäuse und Kugel aus AISI 316~1.4408

Dichtungswerkstoff PTFE / Glasfaser 15%

Einschraubtiefe für Zapfen nach DIN 3852 Teil 2 Form A

Maßabweichungen behalten wir uns vor. Bitte Druck-Temperatur-Diagramm beachten.