



Einteiliger Kugelhahn

aus Feinguß, reduzierter Durchgang, mit Handhebel
mit zylindrischem Whitworth-Rohrgewinde nach DIN/ISO 228
mit Innengewinde nach DIN 2999, geeignet für kegelige Aussengewinde

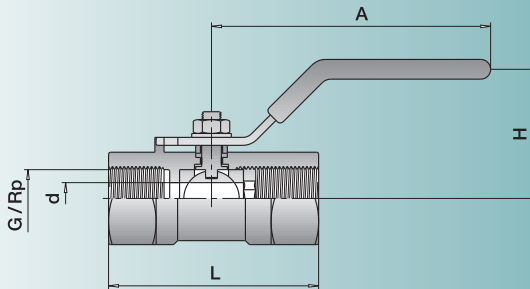

sf
**A-
BVE**

DN	G	d	L	H	A	A-No.	€
8	G 1/4"	5,0	39,0	25	72,0	A-BVEG14-5i	
10	G 3/8"	7,2	44,0	30	81,5	A-BVEG38-5i	
15	G 1/2"	9,2	56,6	45	100,0	A-BVEG12-5i	
20	G 3/4"	12,5	59,0	49	100,0	A-BVEG34-5i	
25	G 1"	15,0	71,0	50	105,0	A-BVEG1-5i	
32	G 1 1/4"	20,0	78,0	53	105,0	A-BVEG114-5i	
40	G 1 1/2"	25,0	82,0	64	135,0	A-BVEG112-5i	
50	G 2"	32,0	100,0	70	135,0	A-BVEG2-5i	

DN	Rp	d	L	H	A	A-No.	€
8	Rp 1/4"	5,0	40,0	33	67,0	A-BVERp14-5i	
10	Rp 3/8"	7,0	45,0	36	67,0	A-BVERp38-5i	
15	Rp 1/2"	9,0	58,0	37	93,0	A-BVERp12-5i	
20	Rp 3/4"	12,5	60,0	42	93,0	A-BVERp34-5i	
25	Rp 1"	16,0	71,0	52	103,0	A-BVERp1-5i	
32	Rp 1 1/4"	20,0	78,0	56	103,0	A-BVERp114-5i	
40	Rp 1 1/2"	25,0	82,5	65	125,0	A-BVERp112-5i	
50	Rp 2"	32,0	100,0	70	125,0	A-BVERp2-5i	

■ Gehäuse und Kugel aus AISI 316~1.4408

Dichtungswerkstoff PTFE

Maßabweichungen behalten wir uns vor.

