


Verschraubung, Innen-Außengewinde

innen mit zylindrischem, außen mit kegeligem Whitworth-Rohrgewinde nach DIN EN 10226


SF
GF-141 R



konisch dichtend

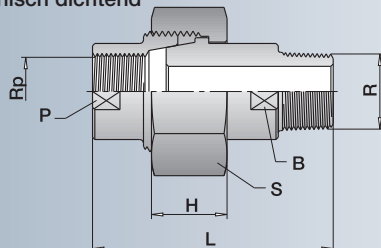

flach dichtend



Verschraubung konisch dichtend

PN	DN	R/Rp	S	P	K	L	H	GF-No.	€
50	6	1/8"	27	14	12	38,5	15	GF-141CR18-7	
	8	1/4"	27	17	14	47,5	16	GF-141CR14-7	
	10	3/8"	32	20	19	51,5	16	GF-141CR38-7	
	15	1/2"	41	24	24	58,5	18	GF-141CR12-7	
	20	3/4"	50	32	30	65,0	20	GF-141CR34-7	
40	25	1"	55	38	36	73,0	22	GF-141CR1-7	
	32	1 1/4"	70	48	46	83,0	24	GF-141CR114-7	
	40	1 1/2"	75	55	53	88,0	25	GF-141CR112-7	
	50	2"	90	67	65	94,5	27	GF-141CR2-7	
	65	2 1/2"	110	85	80	104,0	30	GF-141CR212-7	
25	80	3"	130	100	95	115,0	31	GF-141CR3-7	
	100	4"	155	120	120	135,0	34	GF-141CR4-7	

■ Werkstoff: 1.4571

Verschraubung flach dichtend

PN	DN	R/Rp	S	P	K	L	H	GF-No.	€
25	6	1/8"	27	14	12	38,5	15	GF-141FR18-7	
	8	1/4"	27	17	14	47,5	16	GF-141FR14-7	
	10	3/8"	32	20	19	51,5	16	GF-141FR38-7	
	15	1/2"	41	24	24	58,5	18	GF-141FR12-7	
	20	3/4"	50	32	30	65,0	20	GF-141FR34-7	
16	25	1"	55	38	36	73,0	22	GF-141FR1-7	
	32	1 1/4"	70	48	46	83,0	24	GF-141FR114-7	
	40	1 1/2"	75	55	53	88,0	25	GF-141FR112-7	
	50	2"	90	67	65	94,5	27	GF-141FR2-7	
	65	2 1/2"	110	85	80	104,0	30	GF-141FR212-7	
10	80	3"	130	100	95	115,0	31	GF-141FR3-7	
	100	4"	155	120	120	135,0	34	GF-141FR4-7	


■ Werkstoff: 1.4571

Flachdichtung aus PTFE

bei Temperaturen über 100°C Dichtungswerkstoff anfragen!

Verschraubung, Innen-Außengewinde

innen mit zylindrischem, außen mit kegeligem Whitworth-Rohrgewinde
nach DIN EN 10226



SF
GF-141 R

Verschraubung konisch dichtend

PN	DN	R/Rp	L	S	m	P	p	GF-No.	R/Rp	€ NPT(1)
20	8	1/4"	39	21	13	17	11	GF-141C14-4L		
	10	3/8"	43	27	15	23	14	GF-141C38-4L		
	15	1/2"	51	32	16	27	18	GF-141C12-4L		
	20	3/4"	55	38	17,5	36	24	GF-141C34-4L		
	25	1"	66	48	18,5	42	30	GF-141C1-4L		
	32	1 1/4"	68	55	20	52	38	GF-141C114-4L		
	40	1 1/2"	71	63	21	60	45	GF-141C112-4L		
	50	2"	78	75	26	70	54	GF-141C2-4L		

■ Werkstoff: 4L = AISI 316L

Verschraubung flach dichtend

PN	DN	R/Rp	L	S	m	P	p	GF-No.	R/Rp	€ NPT(1)
20	8	1/4"	39	21	13,0	17	11	GF-141F14-4L		
	10	3/8"	43	27	15,0	23	14	GF-141F38-4L		
	15	1/2"	51	32	16,0	27	18	GF-141F12-4L		
	20	3/4"	55	38	17,5	36	24	GF-141F34-4L		
	25	1"	66	46	18,5	42	30	GF-141F1-4L		
	32	1 1/4"	68	55	20,0	52	38	GF-141F114-4L		
	40	1 1/2"	71	63	21,0	60	45	GF-141F112-4L		
	50	2"	78	75	26,0	70	54	GF-141F2-4L		

■ Werkstoff: 1.4404 AISI 316L

Flachdichtung aus PTFE
bei Temperaturen über 100°C Dichtungswerkstoff anfragen!

1) = NPT mit anderen Maßen

Änderungen vorbehalten.