



Verschraubung Außengewinde-Anschweissende

mit kegeligem Whitworth-Rohrgewinde nach DIN EN 10226

konisch dichtend

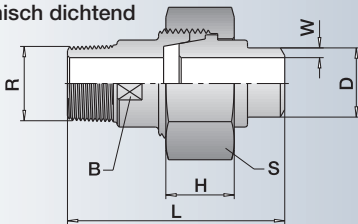

flach dichtend



SF
GF-143 R

Verschraubung konisch dichtend

PN	DN	R	D x W	S	B	L	H	GF-No.	€
50	6	1/8"	10,2 x 2,00	27	12	42	15	GF-143CR18-7	
	8	1/4"	13,5 x 2,35	27	14	48	16	GF-143CR14-7	
	10	3/8"	17,2 x 2,35	32	19	51	16	GF-143CR38-7	
	15	1/2"	21,3 x 2,65	41	24	60	18	GF-143CR12-7	
	20	3/4"	26,9 x 2,65	50	30	68	20	GF-143CR34-7	
40	25	1"	33,7 x 3,25	55	36	76	22	GF-143CR1-7	
	32	1 1/4"	42,4 x 3,25	70	46	86	24	GF-143CR114-7	
	40	1 1/2"	48,3 x 3,25	75	53	93	25	GF-143CR112-7	
	50	2"	60,3 x 3,65	90	65	98	27	GF-143CR2-7	
	65	2 1/2"	76,1 x 3,65	110	80	110	30	GF-143CR212-7	
25	80	3"	88,9 x 4,05	130	95	119	31	GF-143CR3-7	
	100	4"	114,3 x 4,50	155	120	130	34	GF-143CR4-7	

■ Werkstoff: 1.4571

Verschraubung flach dichtend

PN	DN	R	D x W	S	B	L	H	GF-No.	€
25	6	1/8"	10,2 x 2,00	27	12	42	15	GF-143FR18-7	
	8	1/4"	13,5 x 2,35	27	14	48	16	GF-143FR14-7	
	10	3/8"	17,2 x 2,35	32	19	51	16	GF-143FR38-7	
	15	1/2"	21,3 x 2,65	41	24	60	18	GF-143FR12-7	
	20	3/4"	26,9 x 2,65	50	30	68	20	GF-143FR34-7	
16	25	1"	33,7 x 3,25	55	36	76	22	GF-143FR1-7	
	32	1 1/4"	42,4 x 3,25	70	46	86	24	GF-143FR114-7	
	40	1 1/2"	48,3 x 3,25	75	53	93	25	GF-143FR112-7	
	50	2"	60,3 x 3,65	90	65	98	27	GF-143FR2-7	
	65	2 1/2"	76,1 x 3,65	110	80	110	30	GF-143FR212-7	
10	80	3"	88,9 x 4,05	130	95	119	31	GF-143FR3-7	
	100	4"	114,3 x 4,50	155	120	130	34	GF-143FR4-7	

■ Werkstoff: 1.4571


Flachdichtung aus PTFE
bei Temperaturen über 100°C Dichtungswerkstoff anfragen!

Verschraubung

Außengewinde-Anschweissende

mit kegeligem Whitworth-Rohrgewinde nach DIN EN 10226

SF
GF-
143
R



Verschraubung konisch dichtend

PN	DN	R	D	S	m	L	P	GF-No.	R/Rp	€ NPT(1)
20	8	1/4"	13,5	21	13	42	14	GF-143C14-4L		
	10	3/8"	17,2	27	15	44	17	GF-143C38-4L		
	15	1/2"	21,3	32	16	51	22	GF-143C12-4L		
	20	3/4"	26,9	38	17,5	53	27	GF-143C34-4L		
	25	1"	33,7	46	18,5	60	35	GF-143C1-4L		
	32	1 1/4"	42,4	55	20	62	46	GF-143C114-4L		
40	40	1 1/2"	48,3	63	21	65	53	GF-143C112-4L		
	50	2"	60,3	75	26	71	63	GF-143C2-4L		

■ Werkstoff: 4L = AISI 316L

Verschraubung flach dichtend

PN	DN	R	D	S	m	L	P	GF-No.	R/Rp	€ NPT(1)
20	8	1/4"	13,5	21	13	42	14	GF-143F14-4L		
	10	3/8"	17,2	27	15	44	17	GF-143F38-4L		
	15	1/2"	21,3	32	16	51	22	GF-143F12-4L		
	20	3/4"	26,9	38	17,5	53	27	GF-143F34-4L		
	25	1"	33,7	46	18,5	60	35	GF-143F1-4L		
	32	1 1/4"	42,4	55	20	62	46	GF-143F114-4L		
40	40	1 1/2"	48,3	63	21	65	53	GF-143F112-4L		
	50	2"	60,3	75	26	71	63	GF-143F2-4L		

■ Werkstoff: 4L = AISI 316L

Flachdichtung aus PTFE
bei Temperaturen über 100°C Dichtungswerkstoff anfragen!

1) = NPT mit anderen Maßen
Änderungen vorbehalten.